

Forklifts • Order Pickers • Pallet Movers • Stackers • Reach Trucks

# PRODUCT RANGE

**TCM**  
Trusted Partner

  
**SAFETY**

  
**EFFICIENCY**

  
**COMFORT**



**TCM**  
Always Evolving



## SAFETY

### INTEGRAL TO OUR TRUCKS

**STANDARDISING SAFETY ON OUR TRUCKS LEADS TO SAFER WORKING ENVIRONMENTS WITH LESS ACCIDENTS.**

- Stability support systems built in as standard.
- Safety is not just a feature, it's integral to our design ethos.
- Our flexible control systems allow you to optimise the safety features for your applications.
- Inbuilt security functions to prevent unauthorised operation.
- Engineered for 360 degree visibility.



## EFFICIENCY

### INDUSTRY LEADING PERFORMANCE

**CREATING EFFICIENCIES UTILISING NEW TECHNOLOGIES.**

- Low fuel and power consumption.
- Maximising performance to reduce operational cycle times.
- Easy servicing and maintenance, minimising your downtime.
- Eco-modes to save energy.
- High efficiency low maintenance Lithium battery options



Lithium-ion batteries can offer real advantages over lead-acid batteries, particularly in high energy, multi-shift, and 24/7 applications. When it comes to Total Cost of Ownership (TCO), TCM can advise you on the most cost-effective energy solution you will need to meet all your operational requirements.



## COMFORT

### CONSIDERING THE OPERATOR TO INCREASE YOUR PRODUCTIVITY

**FEATURES DESIGNED TO MINIMISE YOUR TOTAL COST OF OPERATION.**

- Utilising the science behind ergonomics to create a truck that works with the operator.
- Intuitive controls for easy operation.
- We understand working environments to enable.
- Operator areas with functionality and easy access in mind.



# Electric Counterbalance Forklift Trucks

FTB 1.4-2.0

**3 WHEEL 48 VOLT COUNTERBALANCE TRUCK**

**LIFT CAPACITY** 1400/1600/1800/2000 kg

**LIFT HEIGHT** Up to 7 metres



FB 1.6-2.0

**4 WHEEL 48 VOLT COUNTERBALANCE TRUCK**

**LIFT CAPACITY** 1600/1800/2000 kg

**LIFT HEIGHT** Up to 7 metres



FHB 2.5-3.5

**4 WHEEL 80 VOLT COUNTERBALANCE TRUCK**

**LIFT CAPACITY**

2500/3000/3500 kg

**LIFT HEIGHT**

Up to 7 metres



FHB 4.0-5.5

**4 WHEEL 80 VOLT COUNTERBALANCE TRUCK**

**LIFT CAPACITY**

4000/4500/5000/5500 kg

**LIFT HEIGHT**

Up to 7 metres



## Diesel/LPG Counterbalance Forklift Trucks

FD/FGE 1.5-3.5

**ENGINE COUNTERBALANCE TRUCK**

**DIESEL LIFT CAPACITY** 2000/2500/3000/3500 kg

**LPG LIFT CAPACITY** 1500/1750/2000/2500/3000/3500 kg

Diesel/LPG

**LIFT HEIGHT**

Up to 7 metres



FD/FGE 4.0-5.5

**ENGINE COUNTERBALANCE TRUCK**

**DIESEL/LPG LIFT CAPACITY** 4000/4500/5000/5500 kg

Diesel/LPG

**LIFT HEIGHT**

Up to 7 metres



FD 6.0-10.0

**ENGINE COUNTERBALANCE TRUCK**

**LIFT CAPACITY** 6000/7000/8000/10000 kg

Diesel only

**LIFT HEIGHTS**

Up to 8 metres



## Pallet Trucks

TE/TV

**PEDESTRIAN HAND  
PALLET TRUCK**

**LIFT CAPACITY**  
2500 kg



PAL

**COMPACT PEDESTRIAN  
PALLET TRUCK WITH  
OR WITHOUT FOLDABLE  
PLATFORM**

**LIFT CAPACITY**  
1600/1800/2000 kg



PTF

**PEDESTRIAN PALLET TRUCK  
WITH RIDER PLATFORM**

**LIFT CAPACITY**  
2000/2500 kg



PTP

**PEDESTRIAN PALLET  
TRUCK WITH PROTECTED  
PLATFORM. SIDE OR  
REAR ENTRY**

**LIFT CAPACITY**  
2000/2500 kg



LLR

**STAND-IN PALLET TRUCK**

**LIFT CAPACITY**  
2000/3000 kg



LLS

**SIT-ON PALLET TRUCK**

**LIFT CAPACITY**  
2000/3000 kg



## Reach Trucks

RTL/RTN

**NARROW CHASSIS  
REACH TRUCK**

**LIFT CAPACITY**  
1200/1400 kg

**LIFT HEIGHT**  
Up to 8.95 metres



RTM/RTH/RTX

**REACH TRUCK**

**LIFT CAPACITY**  
1600/2000/2500 kg

**LIFT HEIGHT**  
Up to 12.1 metres



RTM-TF/RTH-TF

**REACH TRUCK WITH TELESCOPIC FORKS**

**LIFT CAPACITY** 2000/2500 kg  
**LIFT HEIGHT** Up to 10.2 metres



RTF

**4 - WAY REACH TRUCK**

**LIFT CAPACITY**  
2000/2500 kg

**LIFT HEIGHT**  
Up to 9.7 metres



# Stackers

## SPL

**COMPACT PEDESTRIAN STACKER**

**LIFT CAPACITY** 1250 kg

**LIFT HEIGHT**  
Up to 2 metres



## SPD

**COMPACT PEDESTRIAN STACKER FOR DOUBLE-PALLET HANDLING**

**LIFT CAPACITY**  
1250/1600 kg  
on the straddles

**LIFT HEIGHT**  
Up to 2 metres



## SPW/SPR

**COMPACT PEDESTRIAN STACKER WITH OR WITHOUT FOLDABLE PLATFORM**

**LIFT CAPACITY**  
1000/1200/1400/1600 kg

**LIFT HEIGHT**  
Up to 5.4 metres



## SRS

**RIDE-ON PEDESTRIAN STACKER WITH FOLDABLE PLATFORM, OR SIDE OR REAR ENTRY FIXED PLATFORM**

**LIFT CAPACITY**  
1250/1600 kg

**LIFT HEIGHT**  
Up to 5.4 metres



## SRD

**RIDE-ON DOUBLE PALLET STACKER WITH FOLDABLE PLATFORM, OR SIDE OR REAR ENTRY FIXED PLATFORM**

**LIFT CAPACITY**  
2000 kg

**LIFT HEIGHT**  
2.1 metres



## SRO

**STAND-IN STACKER**

**LIFT CAPACITY**  
1250/1600/2000 kg

**LIFT HEIGHT**  
Up to 7 metres



## SSO

**SIT-ON STACKER**

**LIFT CAPACITY**  
1600/2000 kg

**LIFT HEIGHT**  
Up to 7 metres



## SRT/SST

**TELEREACH STACKER STAND-IN AND SIT-ON WITH TELESCOPIC FORKS**

**LIFT CAPACITY** 1000 kg  
**LIFT HEIGHT**  
Up to 6.3 metres



# Order Pickers

## HIGH-LEVEL ORDER PICKER

### EOC

**LIFT CAPACITY**  
1000 kg

**LIFT HEIGHT**  
Up to 8.25 metres



### EOH

**LIFT CAPACITY**  
1250 kg

**LIFT HEIGHT**  
Up to 10.5 metres



## MEDIUM-LEVEL ORDER PICKER

### EOM

**LIFT CAPACITY** 1000 kg  
**LIFT HEIGHT**  
Up to 1.8 metres



## LOW-LEVEL ORDER PICKER

### LO

**WITH STANDARD OR RISING PLATFORM WITH OR WITHOUT RISING FORKS**

**LIFT CAPACITY**  
1200/2000/2500 kg

**LIFT HEIGHT**  
220/850 mm

**PLATFORM HEIGHT**  
123/1000 mm



## Very Narrow Aisle Trucks


### RTS

**SWIVEL REACH TRUCK**

**LIFT CAPACITY**  
1250/1500 kg

**LIFT HEIGHT**  
Up to 10.35 metres



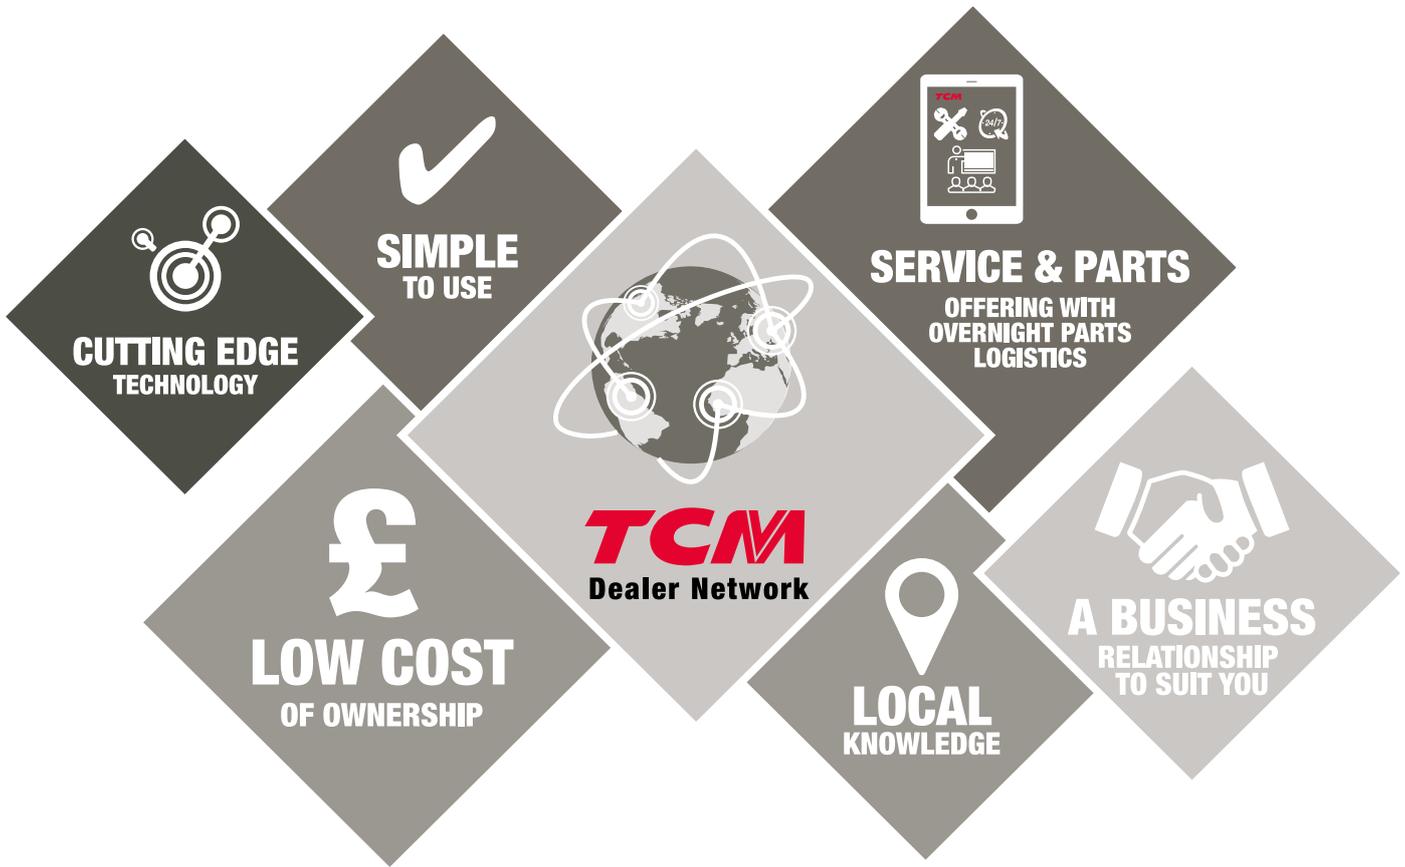

**Li-ION**

Lithium-ion batteries can offer real advantages over lead-acid batteries, particularly in high energy, multi-shift, and 24/7 applications. When it comes to Total Cost of Ownership (TCO), TCM can advise you on the most cost-effective energy solution you will need to meet all your operational requirements.



**LONGER LIFE**



**HIGHER EFFICIENCY**



**LONGER RUNTIME**



**CONSISTENT PERFORMANCE**



**FASTER CHARGING**



**NO MAINTENANCE**



**INBUILT PROTECTION**

info@tcm.eu | tcm.eu

**TCM**  
**Always Evolving**

Mitsubishi Logisnext Europe BV reserves the right to make any changes without notice concerning colours, equipment or specifications detailed in this brochure, or to discontinue individual models. The colours of vehicles delivered may differ slightly from those in this brochure. The specifications vary for different countries depending on local market conditions. Please consult your local dealer to ensure that the vehicle delivered accords with your expectations. All values are determined based on the standard condition and may vary, due to motor and system tolerances, condition of the truck and operational conditions. Some equipment shown on photos are optional. OE2172-0423